



CLEAR GLOSSY ACRYLIC-POLYURETHANE TOPCOAT SAYERLACK


WATER-CLEAR

FAST DRYING

HIGH COVERAGE

EASY TO USE

TOLLERANCE IN
APPLICATION

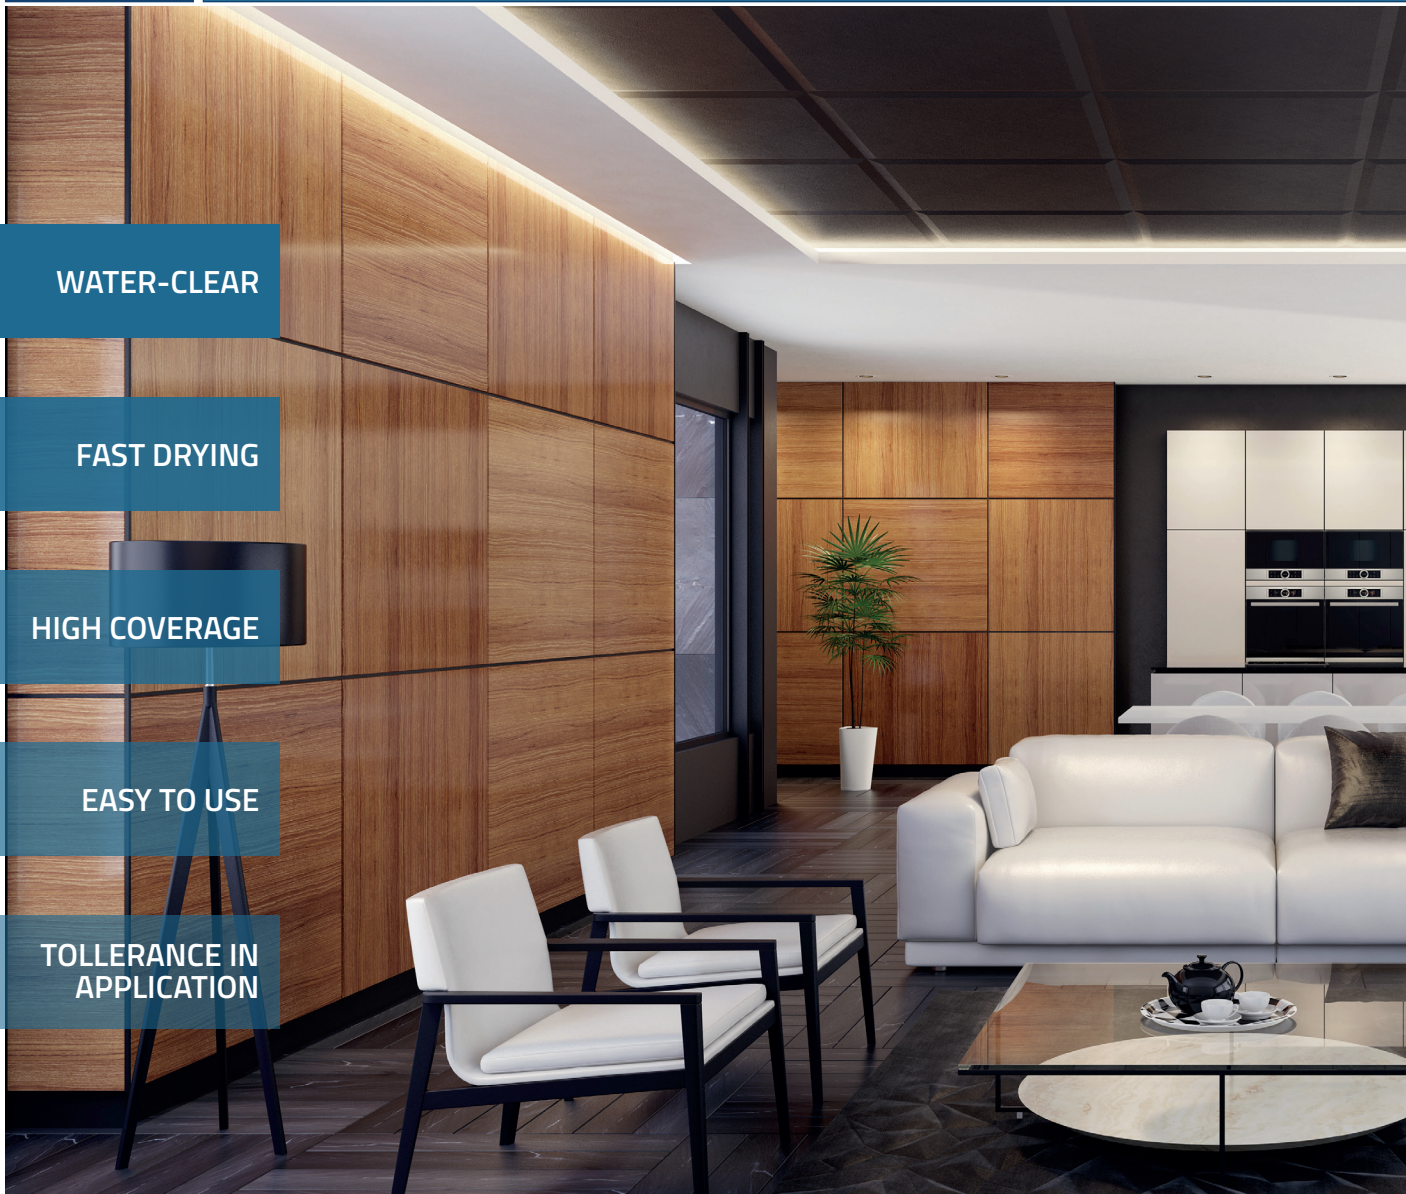

TLL5953/00





CLEAR GLOSSY ACRYLIC-POLYURETHANE TOPCOAT SAYERLACK TLL5953/00

TLL5953/00 is the new clear glossy acrylic-polyurethane topcoats, for flat and turned parts, dedicated in particular to yacht interiors, furniture and kitchens. Colourless, applicable by spray gun or curtain coater, it can be used to overcoat matt lacquers. It is much less affected by application conditions than polyurethane glossy topcoats, minimizing the risk of pinholes. Resistant to light and yellowing.

Excellent characteristics of flow and transparency, combined with a higher speed of drying than traditional acrylic systems. Thanks to a new technology, it also gives considerable fullness, guaranteeing an excellent aesthetic result.

Water-clear acrylic, unlike many other similar products which have slightly pale colours; non-yellowing, makes it possible to apply on lacquered finishes. It does not alter the color of the coated surface, which remains unchanged over time.

Fast drying, while glossy acrylics are usually slow and slow down and complicate the production process with rather long maturation times before polishing.

High coverage, unlike many low solids acrylic glosses which suffer a decline especially over time. Some acrylic glossy topcoats cannot be applied in high thicknesses, otherwise they do not harden in depth

but dry only on the surface. **TLL5953/00** does not have these limits: high thickness and low shrinkage, ease of processing with a lower percentage of waste and higher quality over time. The high thickness allows you to polish without breaking through, the speed allows you to carry out the operation in a short time, the ease allows you to perform the operation in less time and with less effort.

Many finishes currently in the range have one or two of the key characteristics listed above, while the **TLL5953/00** boasts all of them, without presenting the defects of most similar products.

TECHNICAL FEATURES

SECTOR OF USE	Flat parts, turned.
APPLICATION	Spray gun, curtain coater.
CATALYSIS AND DILUTION	By weight (kg) TLL5953/00 100 TH0790/00 60 DT0436/00 30-50
DRYING	In the air (100 gr/m ² a 20°C): dust free 45 minutes touch free 3 hours stackable 48 hours

Technical Service: Ph. +39 051 770770 - Fax +39 051 770521 customerservice@sayerlack.com

Sherwin-Williams Italy S.r.l. - Export Department

Via del Fiffo 12 - 40065 Pianoro (BO) - Italy
Ph. +39 051 770511 - Fax +39 051 770528
export@sayerlack.it - www.sayerlack.com



Sayerlack is a brand of The Sherwin Williams Company